




EXECUTIVE DESIGN SPECIFICATIONS - SYSTEM WITH RECESSED SIDE TRACK (V3A) SOMFY LT50 (Exploded View)

FOR ILLUSTRATION PURPOSES - NOT DRAWN TO SCALE

Parts Spec

- A Roller Assembly (4" / 5") c/w Inserts (L & R)
- B Roller Mounting Bracket (L & R)
(2" x 5-1/2" x 1/4" x 3-1/8" Wide)
- C Motor Bracket (with Retainer, Stainless Steel)
Riveted to Roller Mounting Bracket
- D Idler Bearing (Riveted to Roller Mounting Angle)
- E Electric Motor
- F Spring Idler
- G Not Allocated
- H Drive Gear (Motor Crown)

- I PVC Coated Fiberglass Mesh
or other - see Mesh Specifications
- J Slide Bar
- K Bottom Seal - 4" Shown
(Other options available)
- L Zipper (Around All Sides)
- M Recessed Side Track Assembly
Components: **M1** - Recessed Track
M2 - Recessed Track Clip
M3 - Recessed U-Channel
- N Probe Assembly (3" or 6")
- O #6 x 1" Flathead Screw
- P #6 x 1/2" Panhead
Securing Screws (Tab to Probe)
- Q Not Allocated
- R Track Entry Guide (Optional)
- S Idler Assembly Retainer Clips

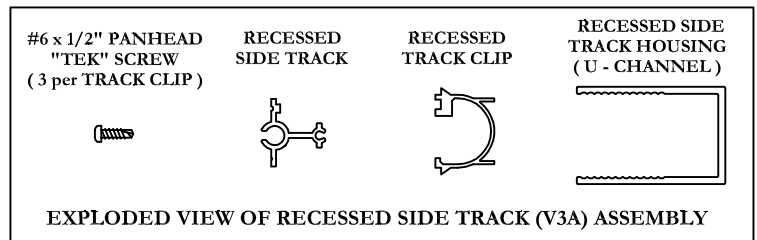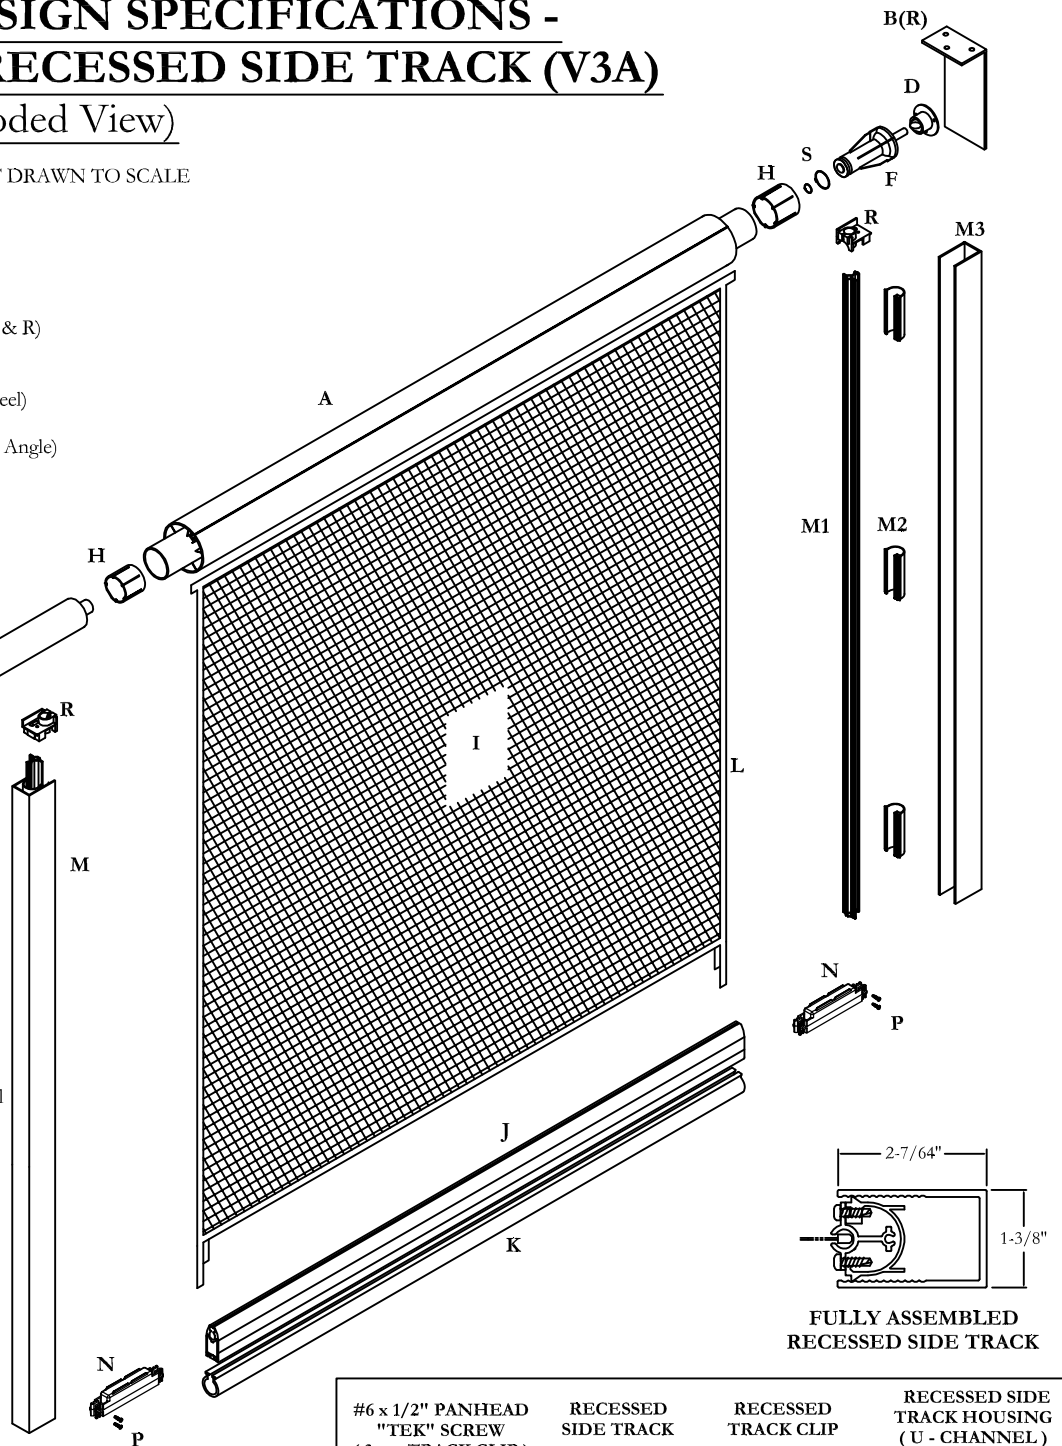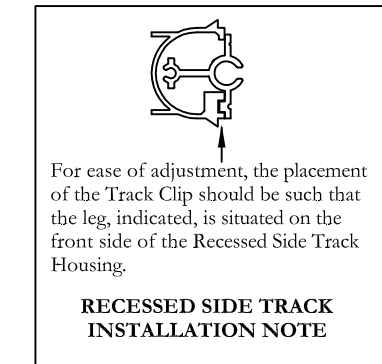

RECESSED TRACK CLIP IS 3" LONG AND PLACED EVERY 2'

All dimensions are given in inches.

Discription of Revisions:		
1. Change Slide Bar and Probe to Universal Version.		
Creator:	Date:	Revision:
NDR	06/17/2013	Rev: 01
Drawing Title:		
PSEXECPRODDESIGNSPEC07(B)		
© 2010 Phantom Mfg. Intl Ltd.		Scale:
		NTS