


SMALL EXECUTIVE DESIGN SPECIFICATIONS - SYSTEM WITH RECESSED SIDE TRACK

(Exploded View)

FOR ILLUSTRATION PURPOSES - NOT DRAWN TO SCALE


Parts Spec

- A Not Allocated
- B Housing Cover Portion of Mounting Bracket Assembly
- C End Cap Portion of Mounting Bracket Assembly (L & R) c/w Fasteners
- D Motor Mounting Bracket (Stainless Steel, to C)
- E Bushing (to C)
- F Electric Motor SOMFY LS40
- G Roller Assembly (2-1/2") c/w Inserts (L & R)
- H Crown
- I Not Allocated
- J Drive Gear
- K Not Allocated

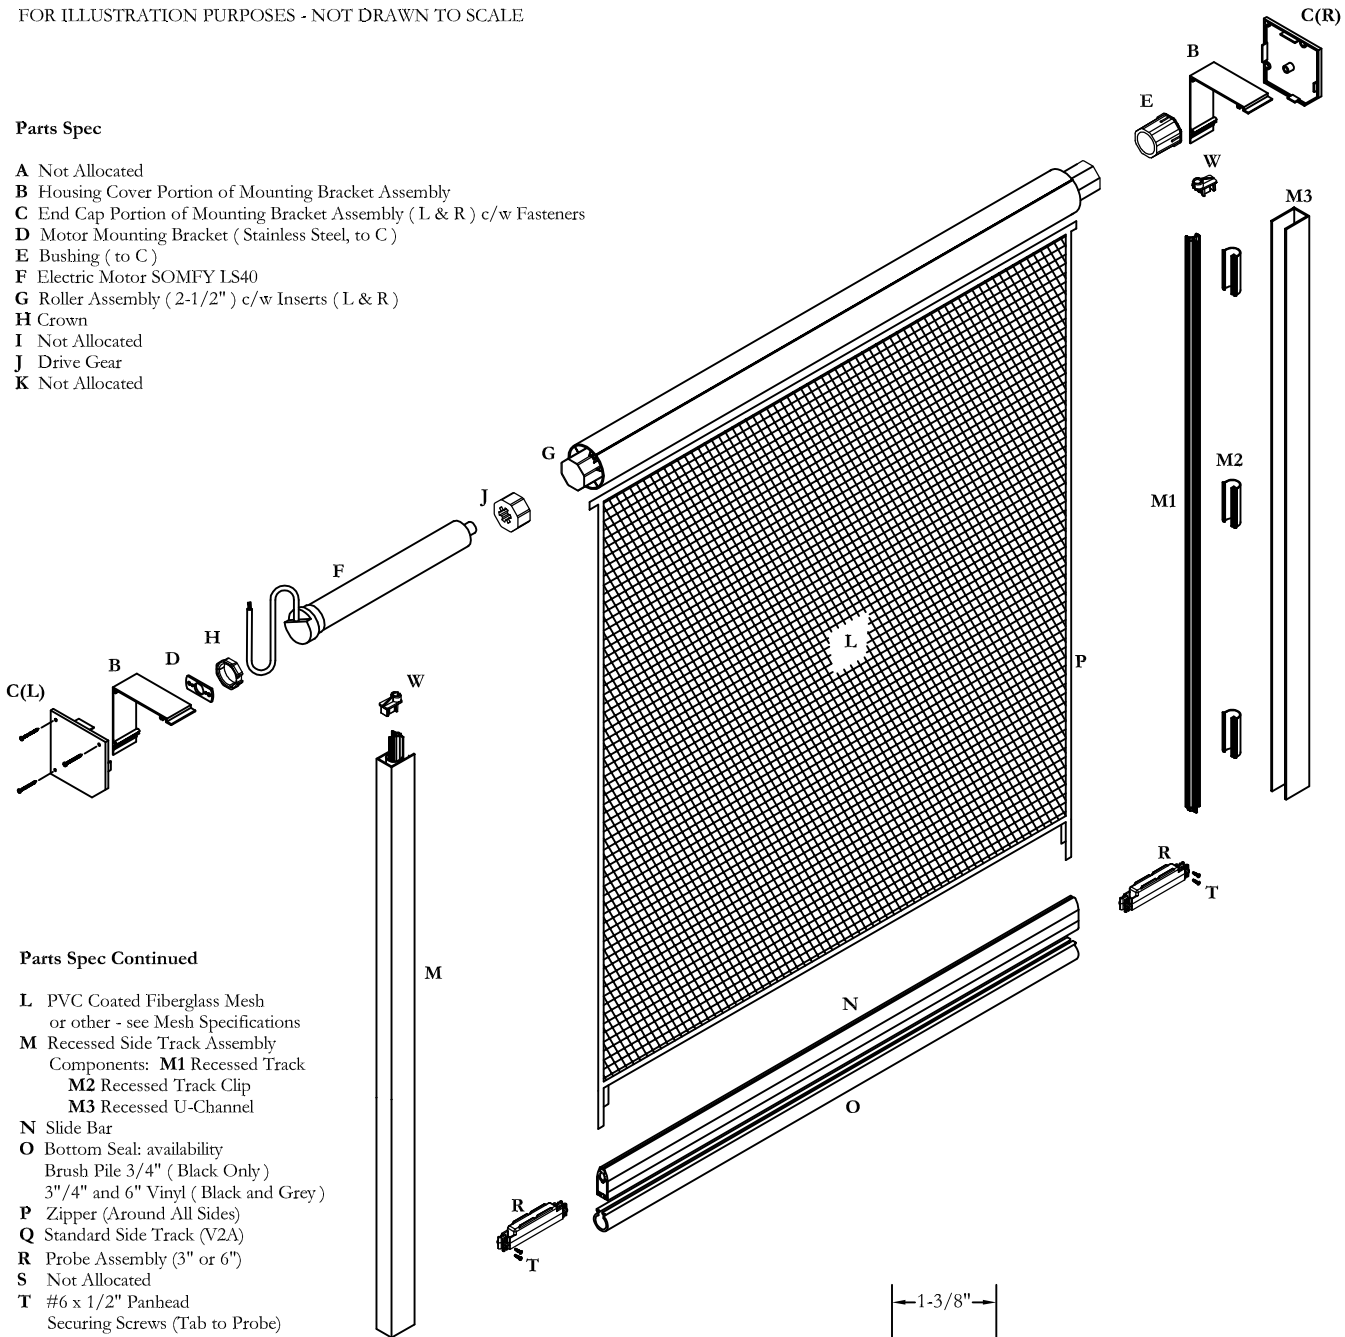


Parts Spec Continued

- L PVC Coated Fiberglass Mesh or other - see Mesh Specifications
- M Recessed Side Track Assembly
Components: M1 Recessed Track
M2 Recessed Track Clip
M3 Recessed U-Channel
- N Slide Bar
- O Bottom Seal: availability
Brush Pile 3/4" (Black Only)
3/4" and 6" Vinyl (Black and Grey)
- P Zipper (Around All Sides)
- Q Standard Side Track (V2A)
- R Probe Assembly (3" or 6")
- S Not Allocated
- T #6 x 1/2" Panhead Securing Screws (Tab to Probe)
- U Not Allocated
- V Not Allocated
- W Track Entry Guide (Optional)



FULLY ASSEMBLED
RECESSED SIDE TRACK

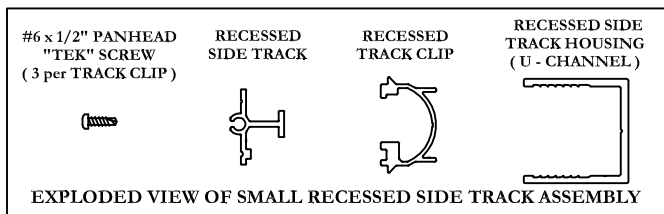

RECESSED TRACK CLIP IS 3" LONG AND PLACED EVERY 2'

Discription of Revisions:

1. Change Slide Bar and Probe to Universal Version.

Creator: NDR	Date: 09/05/2013	Revision: Rev: 01
Drawing Title: PSEXECPRODESIGNSPEC10(B)		
© 2013 Phantom Mfg. Intl Ltd.		Scale: NTS