
Recessed Roller Placement Details - Minimum Cavity Size for 5" Roller


1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.500 [38] 1.1500 [292] 1.000 [25] 1.000 [25] 1.000 [25] 1.150 [292] 1.000 [25] 1.150 [292] 1.000 [25] 1.150 [292] 1.150 [292] 1.000 [25] 1.150 [292] 1.150 [292] 1.150 [292] 1.150 [292] 1.150 [38]

PLACEMENT OF 5" ROLLER, 5-1/2" ROLLER MOUNTING BRACKET AND RECESSED SIDE TRACK

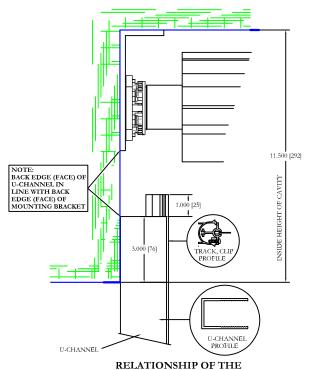

SIDE TRACK U-CHANNEL
TO THE 5-1/2" MOTOR MOUNTING BRACKET

PRODUCT LIMITATION SIZE LIMITATION FOR THE 5 INCH ROLLER IS: 25 FEET (Wide) x 16 FEET (High/Pull Length)



RELATIONSHIP OF U-CHANNEL TO MOTOR BRACKET IN A MINIMUM RECESSED CAVITY C/W 5" ROLLER

All dimensions are given in inches, millimeters conversion in brackets

NOTE:

Smaller cavity sizes may be available for your application;

Please check with your local Phantom Authorized Distributor.

Rev#	Description of Revision	Approved by	Rev Dat
Creator:	Date:	Approved By/Date:	
N.D.R.	07/30/2015		
Drawing Title:	•		
PSEXECINSTALLMINCAVITYSIZE5INCH02			
		Sca	le:
© 2015 Phantom Mfg. Intl Ltd.			1:1